


ELECTRIC ORDER PICKER TOP15E-H

An efficient electric order picker designed to handle up to 1.5 tons of weight, offering versatility and precision for a wide range of material handling tasks.

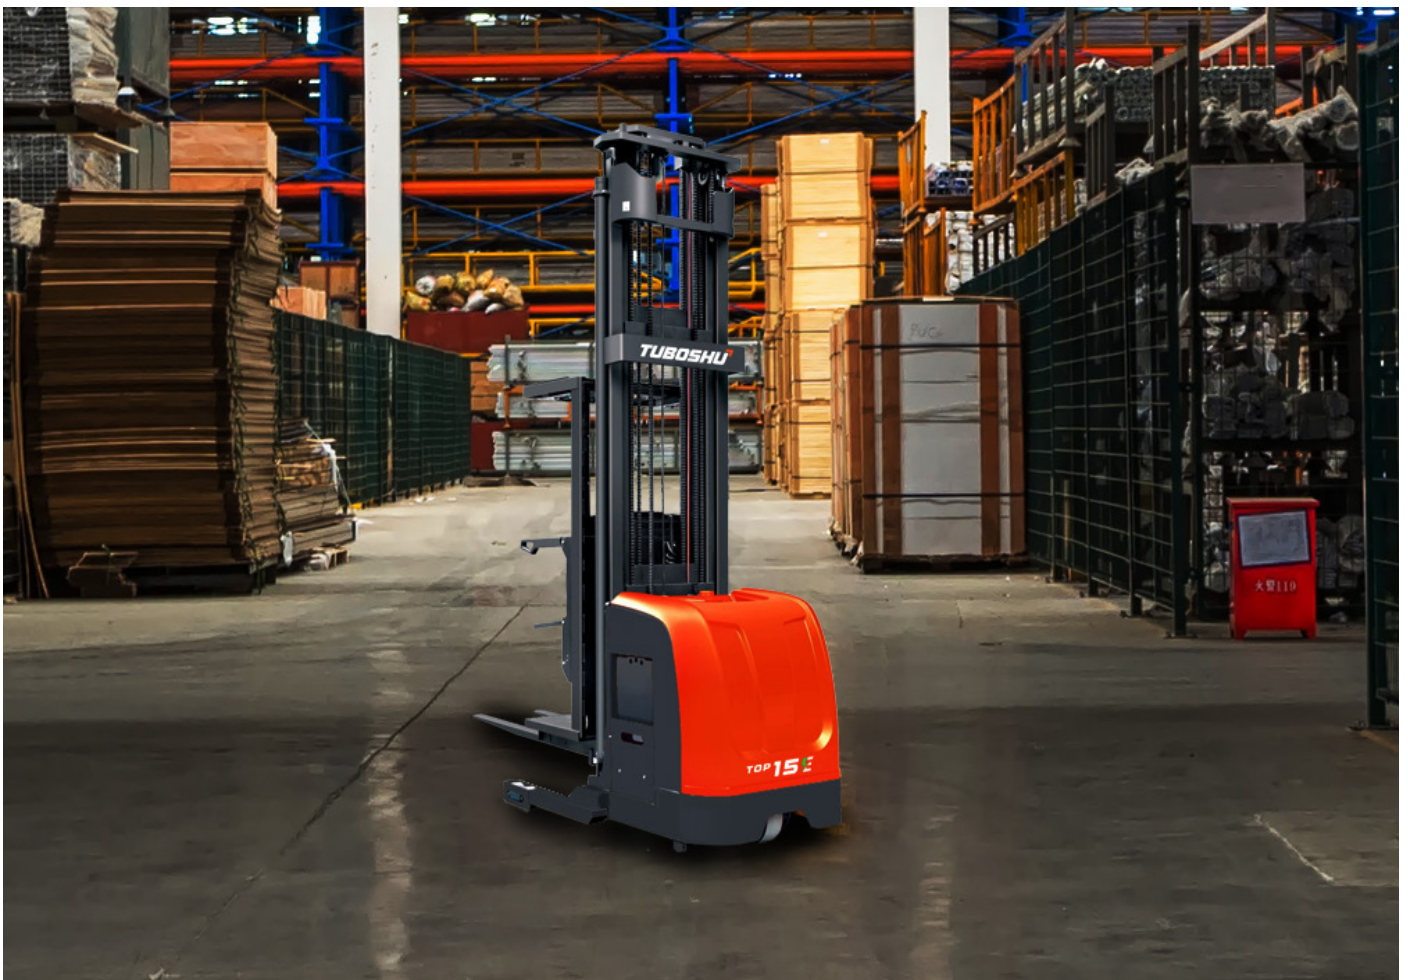

TUBOSHU

SUITE 5, 66 WESTBOURNE TERRACE
LONDON, ENGLAND W2 3UJ
T: +44 7457 405 800

CHARACTERISTICS					
Manufacturer			TUBOSHU		
Model			TOP15		
Configuration Number			OPS15		
Mast Type			3-stage Mast		
Load capacity	Q	kg	1500		
Load Center Distance	C	mm	600		
Driving Mode			Order Picker		
Front Overhang	X	mm	206		
Wheel Base	Y	mm	1537		
TYRES					
Tyre Type			Polyeruthane		
Wheels Number front/rear (x=driven)			1x 2/4		
Track Width, Rear	b11	mm	1236		
Wheel Size, Front		mm	ø310x125		
Wheel Size, Rear		mm	ø128x73		
Wheel Size, Additional		mm	ø150x47		
DIMENSIONS					
Lift Height	h3	mm	5000	7000	9000
Height. Mast Extended	h4	mm	7230	9230	11230
Height. Mast Lowered	h1	mm	2410	3080	3750
Height Between Lowered Fork and Ground	h13	mm	80		
Height of Platform	h7	mm	230		
Fork Size	s/e/l	mm	45/100/1220		
Overall Length	l1	mm	3200		
Length to the Contacting Face Between Fork and Platform	l2	mm	1975		
Overall Width	b1/b2	mm	1100/1352		
Width Across Forks	b5	mm	530/715		
Height of Overhead Guard	h6	mm	2290		
Turning Radius	Wa	mm	1800		
Aisle Width with Pallett 1200x1000, clearance 200	Ast	mm	1400		
Aisle Width with Pallett 800x1200, clearance 200	Ast	mm	1400		
Ground Clearance	m2	mm	51		
PERFORMANCE DATA					
Travel Speed (laden/unladen)		km/h	7.7/8		
Lifting Speed (laden/unladen)		m/s	0-0.15/ 0-0.28		
Lowering Speed (laden/unladen)		m/s	0-0.28/ 0-0.30		
Gradeability (laden/unladen)		%	5/10		
ELECTRIC CONFIGURATION					
Drive Motor Power		kW	4.5		
Lifting Motor Power		kW	7.5		
Steering Motor Power		kW	0.6		
Battery Voltage (Lithium available in Acid)		V/Ah	24/750		
Battery Dimensions L/W/H		mm	982x397x561 (760)		
Controller			CURTIS		
Brake			Electromagnetic		
OTHERS					
Total Weight with Battery		kg	3870		
Battery Weight		kg	610(850)		

