


# **TUBOSHU<sup>7</sup>**

**SPECIFICATIONS SHEET**

## **STACKER TS12E-H ELECTRIC**

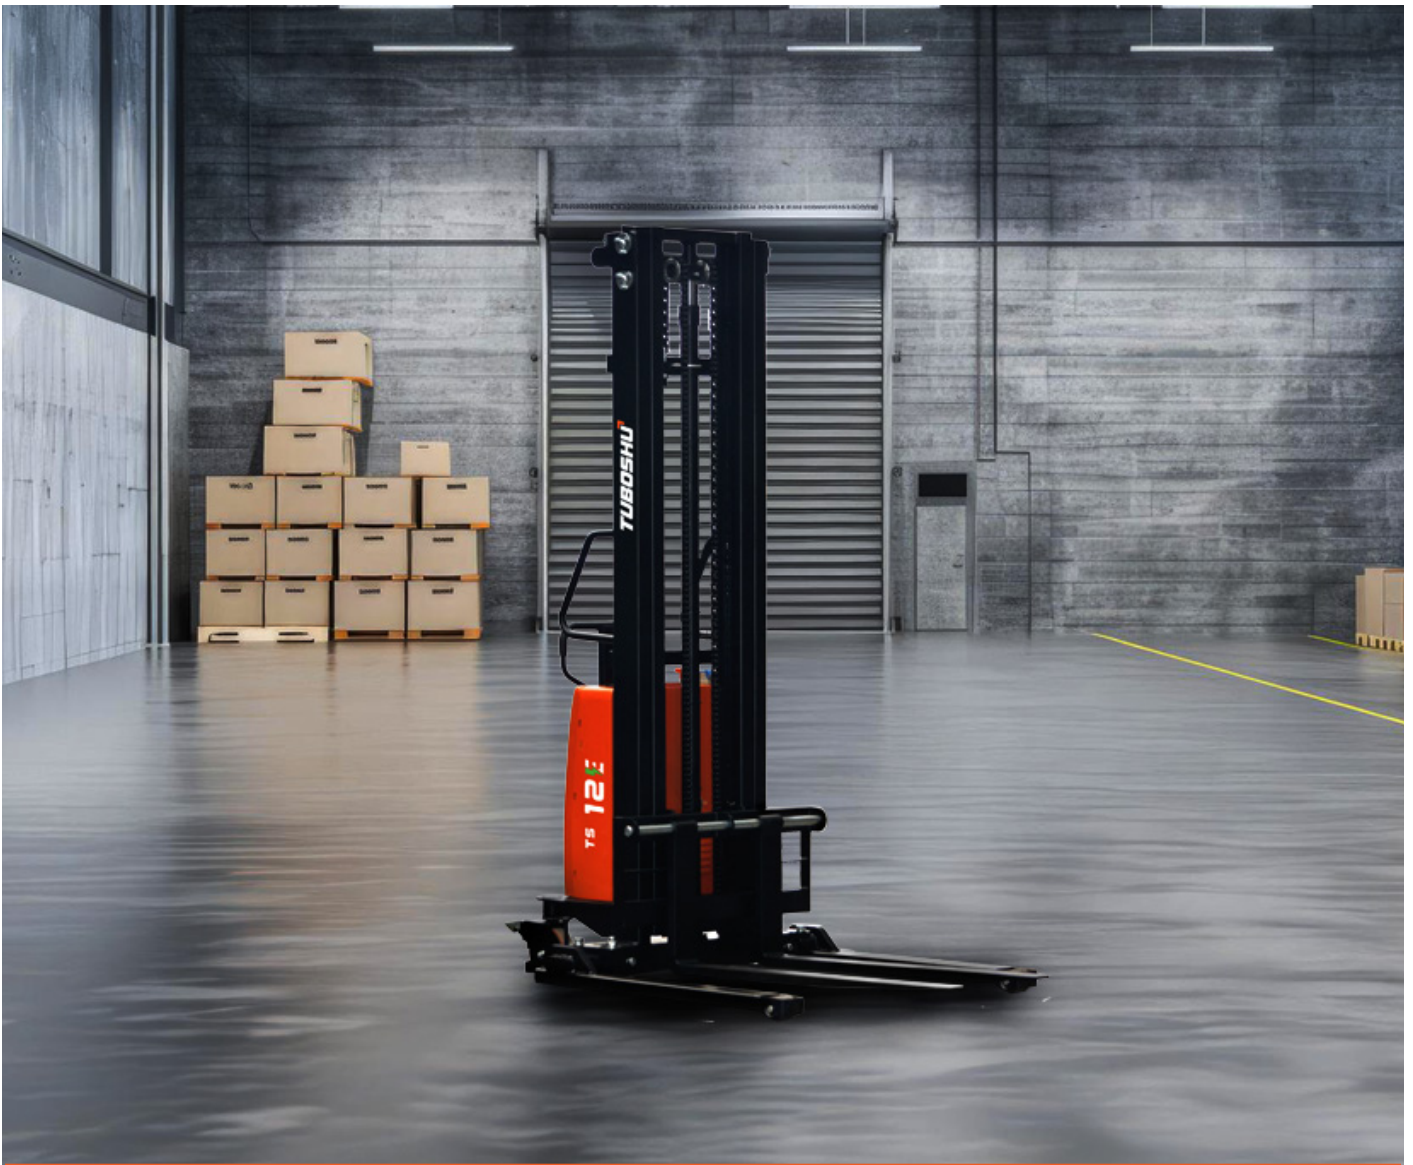

**TUBOSHU**

SUITE 5, 66 WESTBOURNE TERRACE  
LONDON, ENGLAND W2 3UJ  
T: +44 7457 405 800

**[TUBOSHU.CO.UK](http://TUBOSHU.CO.UK)**

CHARACTERISTICS					
Manufacturer	TUBOSHU				
Model	TS12-E				
Configuration Number	CBS12J-K				
Load capacity	1200 kg				
Operation type	Handle				
Mast type	Single Mast	2-Stage STD			
Lift	1600	2000	2500	3000	3500
Capacity at Highest Height	1200	1050	900	750	600
Service Weight with Battery	440	494	505	515	535
Load Centre	600				
Axle Centre to Fork Face	758	753			
Wheel Base	1245				
WHEELS					
Wheel Type	Nylon/Polyurethane				
Driving Wheel Size	180x50				
Bearing Wheel Size	74x70				
Additional Wheels (dimension)	180x50				
Wheels, Number front/rear (x=driven)	1,1/2				
DIMENSIONS					
Height of Mast , Lowered	2146	1646	1896	2146	2396
Height of Mast, Extended	2146	2616	3116	3616	4116
Fork Height, Lowered	60				
Overall Length	1855				
Length to Fork Face	700				
Overall Width	1100-1500				
Fork Dimensions	35/100/1150				
Width of Forks	220-850				
Width of Leg	124				
Min. Ground Clearance	32				
Aisle Width with Pallet 1000 x 1200 across Forks	2354-2450				
Aisle Width with Pallet 800 x 1200 along Forks	2308-2450				
Min. Turning Radius	1492				
PERFORMANCE					
Lifting Speed with/without load	78/145	76/143			
Lowering Speed, with/without load	127/111	108/97			
Service Brake	Machinery				
DRIVE AND BATTERY					
Lift Motor Rating at S3 15%	1.6				
Battery According to DIN43531/35/36 A,B,C, no	no				
Battery Voltage/Rated Capacity	12/120				
Battery Weight (±)	36				
OTHER					
Noise Level at Operator's Ear	≤70				