


PALLET TRUCK

TPT20E-H

ELECTRIC

A powerful electric machine that can lift up to 2 tons of weight, making it suitable for a variety of heavy-duty applications

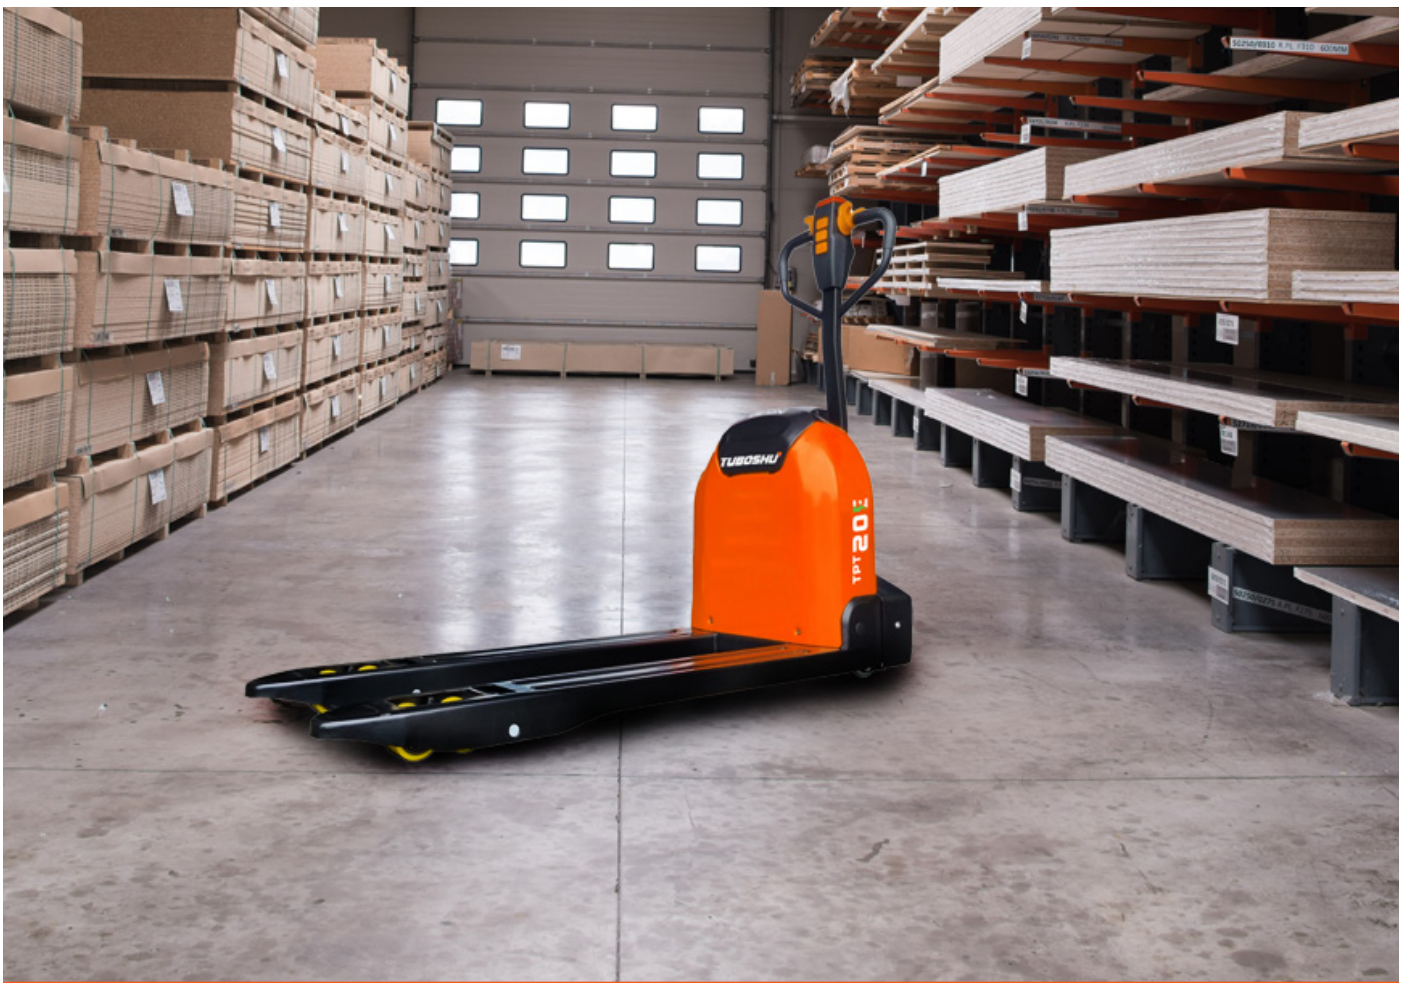

TUBOSHU

SUITE 5, 66 WESTBOURNE TERRACE
LONDON, ENGLAND W2 3UJ
T: +44 7457 405 800

CHARACTERISTICS			
Manufacturer		TUBOSHU	
Model		TPT20-E	
Configuration Number		CBD20J-Li3	
Power Unit		Electric	
Operation		Pedestrian	
Rated Traction Weight	Q (t)	2.0	
Load Centre	c (mm)	600	
Axel Centre to Fork Face	x (mm)	944	
Wheelbase	y (mm)	1190	
WEIGHT			
Service Weight with Battery	kg	150	
WHEELS/TYRES			
Wheels Type		Polyeruthane	
Driving Wheel Size	∅ x w(mm)	∅ 210x70	
Bearing Wheel Size	∅ x w(mm)	∅80x60	
Wheels Number front/rear (x=driven)		1x/4	
Track Width	b11 (mm)	400/535	
DIMENSIONS			
Lift	h3 (mm)	200	
Overall Height (with handle)	h14(mm)	725/1145	
Lowered Length	h13(mm)	85	
Overall Length	l1(mm)	1550	
Length to Fork Face	l2(mm)	400	
Overall Width	b1/b2(mm)	550/685	
Fork Dimensions	s/e/l (mm)	50/150/1150	
Width of Forks	b5(mm)	550/685	
Min. Ground Clearance	m2(mm)	35	
Aisle Width with Pallett 1000x1200 Across Forks	Ast(mm)	1750	
Aisle Width with Pallett 800x1200 Along Forks	Ast(mm)	1800	
Min. Turning Radius	Wa(mm)	1345	
PERFORMANCE DATA			
Travel Speed (laden/unladen)	km/h	4.2/4.5	
Maximum climbing Ability, with/without Load	%	5/10	
Service Brake		Electromagnetic Brake	
DRIVE			
Drive Motor, 60 Minute Rating	kW	0.75	
Lift Motor Rating at 53 15%	kW	0.8	
Battery According to DIN 43531/35/36 A,B,C,no		no	
Battery Voltage/Rated Capacity	V/Ah	48/15	48/20
Battery Weight (± 5%)	kg	7	8.2
OTHERS			
Type of Drive Control		DC	
Noise Level at Operator's Ear	dB(A)	≤70	
Steering Type		Mechanical Steering	
Controller Brand		Curtis/Domestic (optional)	